

3761.01 AM/FM, DAB/ DAB+, GPS

Kombiflex-Dachantenne

Dachantenne mit folgenden Funktionen und Eigenschaften:

- **DAB***-Empfang, aktiv und rauscharm in den Bereichen B III, L-Band passiv
- Rundfunkempfang, aktiv und rauscharm für **LMK/UKW**
- 12 V-Stromversorgung der Verstärker wahlweise über Innenleiter der Kabelanschlüsse oder DIN-Steckhülse
- aktive **GPS**-Antenne (Phantom Stromversorgung)
- geräuscharmer Antennenstab
- geringe Einbautiefe (15 mm)
- geringer Montageaufwand - nur eine Montagebohrung für 3 Funktionen
- austauschbar mit herkömmlichen Flex-Antennen

Besonders geeignet für:

- analogen und digitalen Rundfunk
- Navigationssysteme
- Flottenmanagement

Ersatzstrahler: 4626.11

Combi Flex Roof Mount Antenna

A roof mount antenna with the following functions and features:


- Active and low noise **DAB*** receiving (B III, L-Band)
- Active and low noise **AM/FM** receiving
- 12 V power supply of the amplifiers optionally via inner conductor of the cable connections or DIN receptacle
- Active **GPS** antenna (Phantom Power Supply)
- Low wind noise antenna rod
- Small installation depth (15 mm)
- Easy fit – only one hole for 3 functions
- Compatible with conventional flex antennas

Used for:

- Analogue and digital broadcast
- Navigation systems
- Fleet management

Spare rod: 4626.11

*) Digital Audio Broadcast

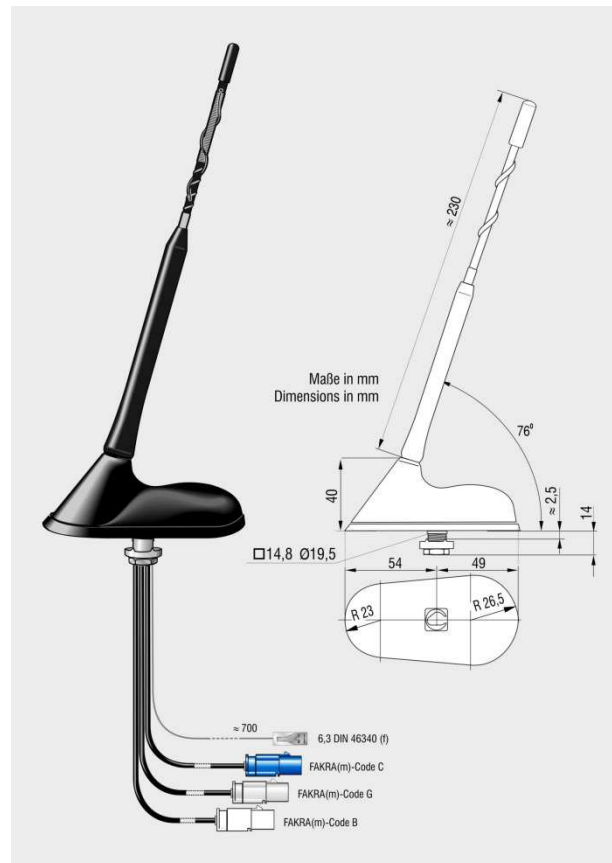

Frequenzbereich	Frequency Range	LMK / AM	UKW / FM	B III	L-Band	GPS
Frequenz	Frequency	0,15-16 MHz	87,5-108 MHz	174-240 MHz	1452-1492 MHz	1575,42 MHz
Impedanz	Impedance	50 Ω				
Anpassung	VSWR	≤ 3,0 : 1	≤ 2,0 : 1	≤ 2,0 : 1	≤ 1,8 : 1	≤ 1,5 : 1
Verstärkung	Amplification	6 dB	14 dB	10 dB	0 dB	28 dB ± 3 dB
Rauschmaß	Noise Figure		3,5 dB typ.	2,0 dB typ		1,7 dB typ.
Stromversorgung	Power Supply	+ 12 V, 25 mA		+ 12 V, 25 mA		+ 3,0...5,5 V 15...40 mA
Kabel RG 174	Cable RG 174	110 mm		200 mm		150 mm
Steckverbinder	Connector	FAKRA(m)-B		FAKRA(m)-G		FAKRA(m)-C

Irrtümer und technische Änderungen vorbehalten - Errors and technical changes reserved