



Installation Manual

Fiat 500 (312) 06/2007 ->
Fiat 500 C (312) 09/2009 ->

Colour: Part-No.:
beige: 381094-33-1
piano-black: 381094-33-2
black: 381094-33-3

Compatible with Double-DIN devices


Double DIN navigation




Kit Content

- (A) Paddles for air vent
- (B) Foam
- (C) Metal cage
- (D) Side springs / Mounting hardware
- (E) Housing / Panel


*All installation work must be performed by a qualified professional installer only.
The manufacturer / dealer is not liable for any kind of incidental or indirect damages.*

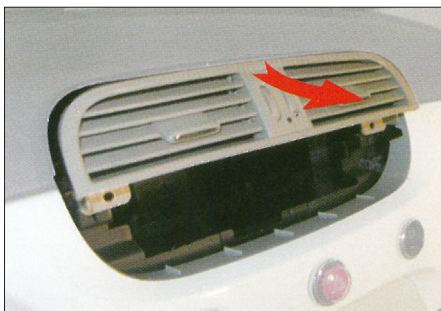


1. Remove the original Radio and air vent cover

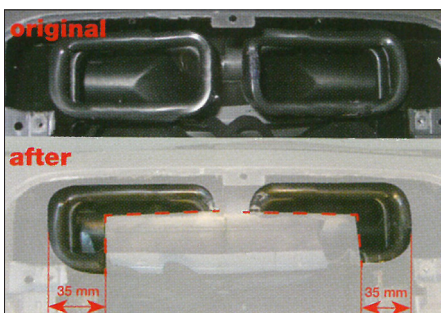


2. Without removing it, cut the front of the air vent duct as shown. It is recommended to offer the cage to the opening to check the measurement before the final cut !

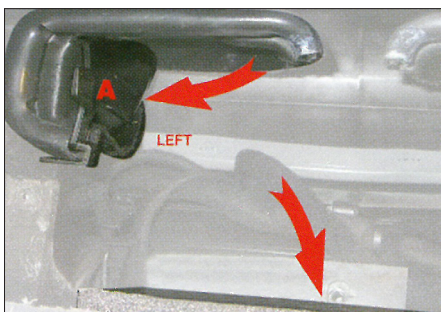

3. Insert the paddles (A) into the cut ducts, using the „U“ section to guide the correct position. Remove backing paper and the stick the foam block (B) in central position as shown

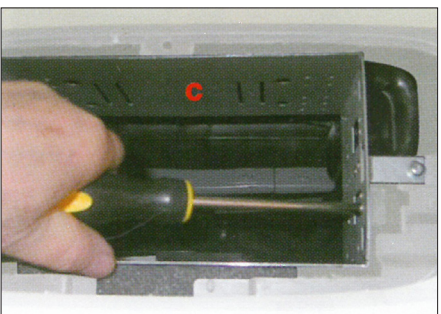


4. Locate the cage (C) in position, ensuring correct alignment to the foam block and fix it as shown

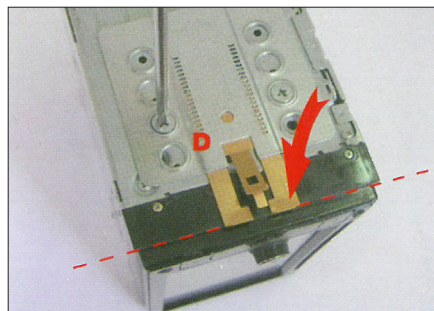

5. Apply the springs (D) to the 2-DIN Navigation using the mounting hardware (D) as necessary



6. Insert the 2-DIN Navigation into the cage until the springs click and engage fully

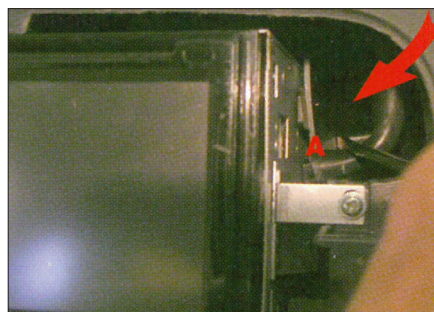

7. Using a screwdriver, or similar push the paddles (A) against the sides of the 2-DIN Navigation to ensure correct air flow from the ventilation ducts



8. Carefully apply the Housing / Panel (E). First locate the top clips and then the lower section