

# FLAX EVO

## P 25 FSE

Technical Sheet

10" (250mm) Subwoofer




### SPECIFICATIONS

Nominal power	280W RMS	
Maximum power	560W	
Sensitivity (2.83V/1m)	87dB	
Cone	Flax	
Surround	Rubber	
Nom. impedance	4Ohms	
DC resistance	3.2Ohms	
VC diameter	38mm	1.5"
Former	Glass fiber	
Layers	4	
Wire	Copper	
Net weight	3.5kg	6.61lbs
Driver Displacement	2l	0.07cu.ft.

### FREQUENCY RESPONSE / IMPEDANCE

Sealed enclosure


P25FS Closed box frequency response

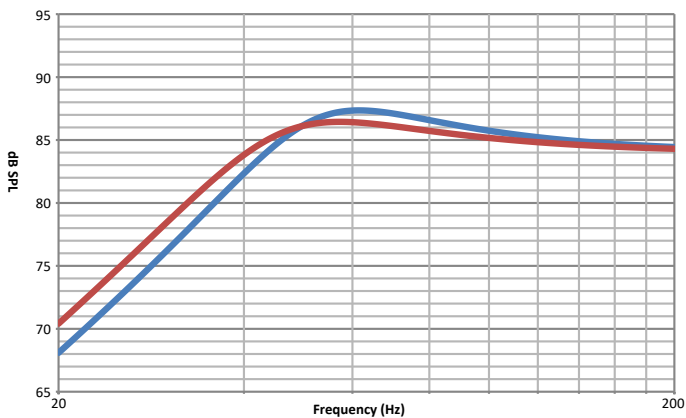

### PARAMETERS

Rdc	31Hz
Fs	29L
Mms	0.45
Cms	0.51
Vas	4.5
Qts	3.7Ohms
Qes	347cm <sup>2</sup>
Qms	0.17mm/N
Bxl	145g
Sd	14.8N/A
SPL	85dB
Xmax	11mm

### MECHANICAL DRAWING

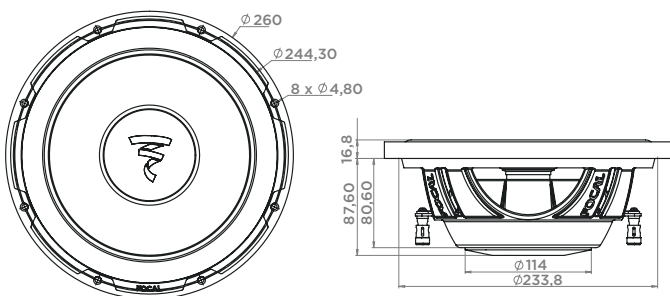

### SUGGESTED APPLICATION

Sealed enclosure

Volume	F-3 (Hz)
12L (0.42 cu.ft.)	37.5Hz
18L (0.64 cu.ft.)	34Hz